

Everest G12R Series 430-455W

96-cell Bifacial HJT Half Cell
Double-glass Solar Module

Efficiency
up to
22.8%



HJT Technology

Combining gettering process and $\mu\text{c-Si}$ technology to ensure higher cell efficiency and higher module power



Up to 95% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.



Sealing with PIB

Integrated coating frames ensuring modules passing the IEC salt-mist test level 8



Ideal choice for rooftop system

Suitable for various rooftop projects



WARRANTY

Product
Warranty **30**
years

Linear
Power
Warranty **30**
years

Complete System and Product Certifications:


IEC61215, IEC61730

ISO9001:2015 Quality Management System

ISO14001:2015 Environment Management System

ISO45001:2018 Occupational Health and Safety

IEC62941:2019 Terrestrial photovoltaic (PV) modules- Quality system for PV module manufacturing

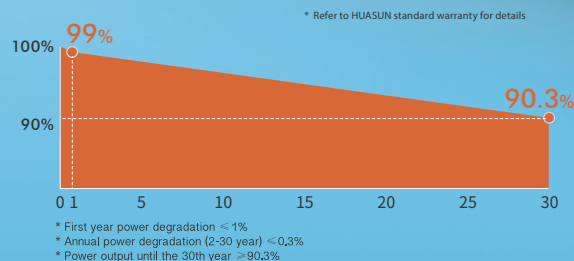

HS-210R-B96


430-455W

96-Half-Cell Bifacial HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re

Engineering Drawings

Unit: mm

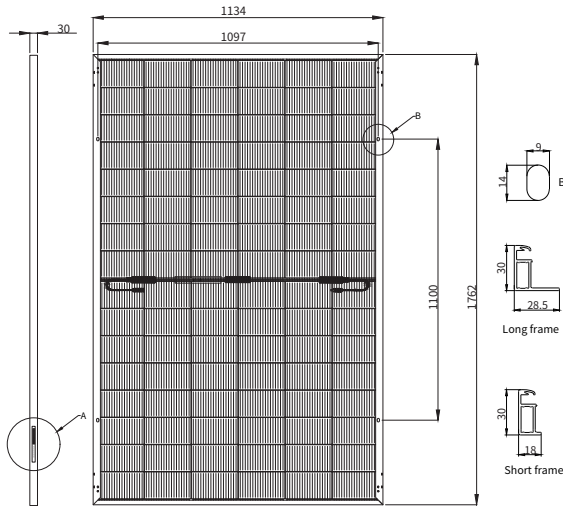

Mechanical Characteristics

Cell Type	HJT
No. of Cells	96 (6x16)
Dimensions	1762x1134x30mm
Weight	21.8 kg
Junction Box	IP68
Cable	4mm ² ; 1250mm or customized; UV resistant
Connector	MC4 / MC4-Evo2A / PV-H4 / Z4S-abcd / ST4
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 1.6mm

Electrical Characteristics

STC

HS-210R-B96	DSN430	DSN435	DSN440	DSN445	DSN450	DSN455
Maximum Power (Pmax/W)	430	435	440	445	450	455
Module Efficiency (%)	21.5	21.8	22.0	22.3	22.5	22.8
Voltage at Pmax (Vmp/V)	30.39	30.50	30.61	30.72	30.83	30.94
Current at Pmax (Imp/A)	14.16	14.27	14.38	14.49	14.60	14.71
Open Circuit Voltage (Voc/V)	36.32	36.42	36.52	36.62	36.72	36.82
Short Circuit Current (Isc/A)	15.09	15.20	15.31	15.42	15.53	15.64

STC: AM1.5, 1000W/m², 25°C.

BSTC

Maximum Power (Pmax/W)	482	487	493	499	504	510
Voltage at Pmax (Vmp/V)	30.50	30.61	30.72	30.83	30.94	31.05
Current at Pmax (Imp/A)	15.81	15.94	16.07	16.19	16.31	16.44
Open Circuit Voltage (Voc/V)	36.45	36.55	36.65	36.75	36.85	36.95
Short Circuit Current (Isc/A)	16.92	17.05	17.17	17.29	17.42	17.54

BSTC: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

Maximum Power (Pmax/W)	328	332	335	339	343	347
Voltage at Pmax (Vmp/V)	29.01	29.12	29.23	29.34	29.45	29.55
Current at Pmax (Imp/A)	11.32	11.40	11.49	11.58	11.67	11.76
Open Circuit Voltage (Voc/V)	34.67	34.76	34.86	34.95	35.05	35.14
Short Circuit Current (Isc/A)	12.06	12.15	12.24	12.32	12.41	12.50



NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40HQ
Modules Per Pallet	36
Pallets Per Container	26
Modules Per Container	936

I-V Curve

(HS-210R-B96DSN445)

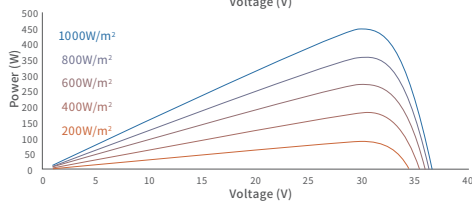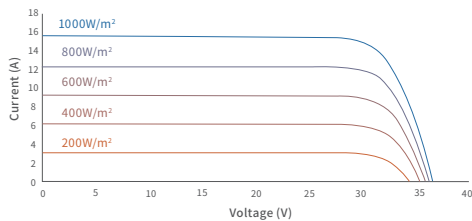

Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2024

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
Tel: 0086-563-3318095 www.huasunsolar.com
sales@huasunsolar.com customerservice@huasunsolar.com

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.